



# Promax<sup>vac</sup>

**Manufacturer of Food Processing  
& Packaging Machinery**



## QUALITY YOU CAN TRUST!

### **Head Office**

1915 E. Acacia Street, Ontario, CA91761, USA  
Tel:1-909-923-3888 Fax:1-909-923-3588  
E-mail:sales@promarksvac.com

### **East Coast Office**

JVR INDUSTRIES INC.  
100 West Drullard Ave Lancaster NY14086, USA  
Tel:1-716-897-4309 Fax:1-716-897-4731  
www.jvrinc.com


### **Asia Office**

Foodmax Machinery Co., Ltd.  
No 9 Zhongsing Road, Chia-Tai Industrial Area, Chia-Yi, 61252, TAIWAN  
TEL:886-5-2383788 FAX:886-5-2385388  
E-mail:sales@foodmax.us

[Http://www.promaxvac.com](http://www.promaxvac.com)


# ST Series Hot Water Shrink Tank Technical Specifications

MODELS	ST-68
Max. Product Height	10.8"/275mm
Immersion Platform (L) Size (W)	34.2"/870mm 24.8"/630mm
Immersion Depth	13"/330mm
Cycle	Up to 8/per min
Water Capacity	85 gal/310 liters
Electric Heating	25kw/80A
Voltage	220V/3PH/60HZ
Machine Size LxWxH	1476x1400x1310mm 58"x55"x52"
Machine Weight	922 lbs/418 kg

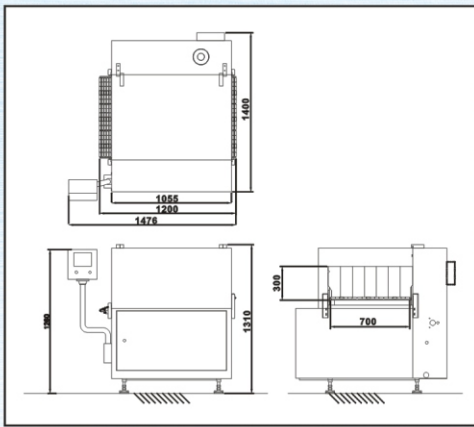

**ST-68**

MODELS	ST-10
Max. Product Height	12"/305mm
Immersion Platform (L) Size (W)	22.8"/580mm 13.7"/350mm
Immersion Depth	14"/355mm
Cycle	Up to 15/per min
Water Capacity	30 gal/100 liters
Electric Heating	12kw/32A
Voltage	220V/3PH/60HZ
Machine Size LxWxH	915x665x1528mm 36"x26"x60"
Machine Weight	414 lbs/188 kg

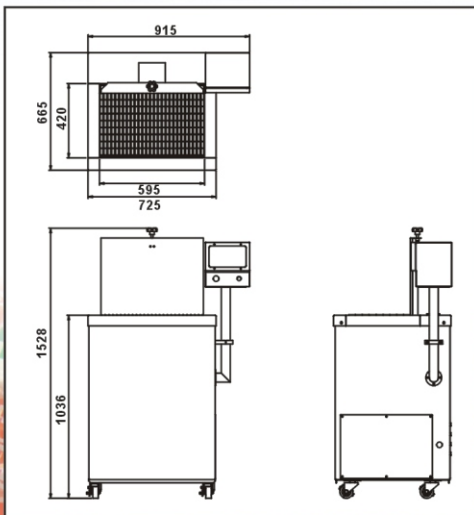

**ST-10**

#### Standard Features:

- Stainless Steel Construction
- Electric Heating
- Programmable temperature control
- Simple push button cycle operation (ST-10)
- On/Off indicator light
- Easy access for cleaning and maintenance
- High performance insulation to avoid heat loss
- Easy fill and drain tank
- Low energy consumption
- Auto dip tank with conveyor (ST-68)

#### Options Features:

- Custom voltage

**All specifications are subject to change without notice.**

**Ask Us about our quality products !**