

PRS MINI SERIES **PRS** 320/420

small footprint, **BIG FEATURES**

Equipped with features found on large machines but packed into an ultra-compact frame. The PRS Mini Series was designed to fit the smallest of spaces. Available in both a 320 or 420 web width and cut-off lengths of 200-300mm, these machines will accommodate a variety of applications. Standard options include independent die lifting stations, 5/8" transport chains, toolless die head removal, and Busch vacuum pumps, just to name a few.



**TRIM
WINDERS**

**QUICK
CHANGE
TOOLING**

**SERVO
CHAIN DRIVE**

**BUSCH
VACUUM
PUMP**

**ADVANCED
SAFETY SYSTEM**

SPEED

Up to **5x faster** than chamber vacuum sealing. Increase production and reduce labor costs.

PRECISION

Create uniformity with your packaging to enhance the look of your displayed products.

VERSATILE

Optional tooling, exit conveyors, printers, and vacuum pumps. Customized solutions to fit your specific application.

ACCESSIBLE

Removable side panels provide easy access to all major components so you can easily maintain your unit for many years of trouble-free usage.

STAINLESS STEEL CONSTRUCTION | ADVANCED FEATURES | ULTRA COMPACT



Consult with a packaging specialist today!
(716)206-2500 | www.JVRINC.com

PRS MINI SERIES **PRS** 320/420


small footprint, **BIG FEATURES**

FEATURES

- **Stainless Steel Construction**
- **Ultra Compact**
- **7'-9' Long** (Depending On Configuration)
- **Available In 320 Or 420mm Web Widths**
- **200-300mm Cut-off Lengths**
- **Trim Scrap Winders**
- **Guillotine Crosscut Knives**
- **Independent Die Lifting System**
- **7" Touch Screen With User Friendly Interface**
- **Quick Change Tooling**
- **Adjustable Pocket Depth**
- **Removable Side Panels**
- **Busch Vacuum Pump**
- **Chain Lubrication System**
- **Casters For Easy Mobility**
- **3 Open Loading Stations**
- **Product Discharge Shoot**
- **Remote Diagnostics**

OPTIONS

Motorized Exit Conveyor
Perimeter Sealing
Photo Eye For Registered Print Films
Vacuum Pump Sizes
Printer And Date Coders
Gas Injection System
Water Recirculating System

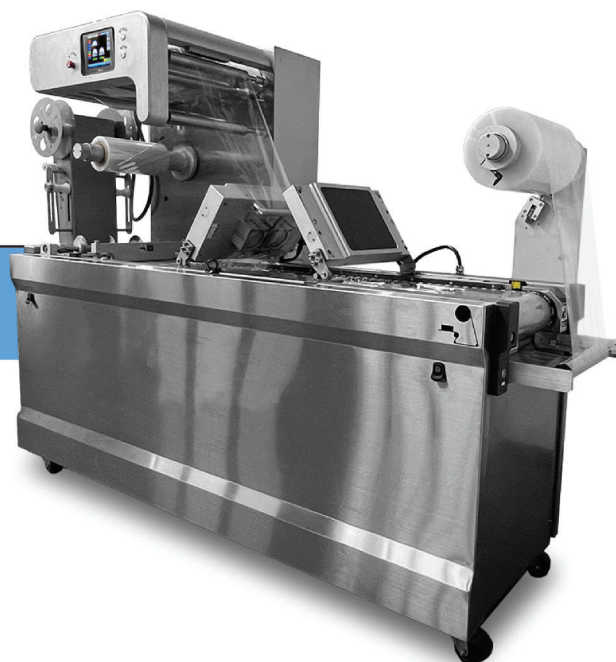

SPECIFICATIONS

MODELS	PRS-320	PRS-420
POWER SUPPLY	220V/ 3PH 60HZ	220V/ 3PH 60HZ
VACUUM PUMP	Busch 40m ³ /h (63m ³ /h optional)	Busch 63m ³ /h (100m ³ /h optional)
AIR CONSUMPTION	17 CFM @ 100 PSI (clean dry air)	20 CFM @ 100 PSI (clean dry air)
WATER CONSUMPTION	1/4 GPM @ 50 PSI	1/4 GPM @ 50 PSI
MAX. FORMING DEPTH	80mm	80mm
CUT OFF LENGTH	200/216/240mm	240/300mm
OPEN LOADING STATIONS	3 STATIONS	3 STATIONS

Specifications are subject to change without notice